



# Guardex

## WALK THROUGH METAL DETECTOR

# GRD-UB400

**18 ZONES STANDARD**

### PARAMETERS

- Gross weight: 45KG
- Power Supply: AC100V-240V
- Working temperature: -20°C--+50°C
- Working Frequency :4KHZ—8KHZ
- Standard External size: 2200mm(H)X800mm(W)X480mm(D)
- Standard Internal size: 2010mm(H)X700mm(W)X400mm(D)
- Package size for door panels: 2290\*560\*190mm \*1ctn
- Package size for control unit: 760\*380\*260 mm\*1ctn

### USE DOMAIN



Port



Airport



Train Station



Hospital



Hotel



Factory



Government



Bank



**bilmak**  
security systems

T : 0 212. 225 80 50 pbx  
M : bilmak@bilmak.com.tr  
www.bilmak.com.tr



## USAGE CONDITION

### GRD-UB400

#### PINPOINT ZONE DETECTION

The Uniqscan' s exclusive multiple target pinpointing with 18 zones standard shows precise target location on the left, center and right side of the body from head to toe.


#### ENTRY PACING LIGHTS

Smooth, efficient traffic flow with easy-to-view, eye-level pacing lights with international "wait" and "proceed" symbols on the entrance side of each panel.

#### FLOOR MOUNTING OPTION

The GRD-UB400 can be mounted using the optional Adhesive Floor Mounting Kit, which can be used to protect valuable flooring surfaces while preventing unit movement.

## PRODUCT DETAILS

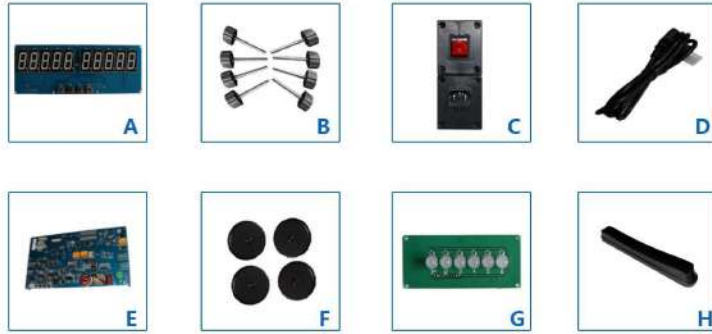

- A. 5 Digital LED Count** :Easy show & count passengers
- B. 8 Screws**: Easy assembly and install;
- C. Socket**: Easy connect both door panels;
- D. Power Line** : Support UK / European / USA standard;
- E. Integrated Circuit Board** : Intelligent circuit;
- F. Infrared Sensor** :Accuracy check;
- G. Tamper Indication**: Easy distinguish interference;
- H. Foot Cover**:Easy fastness;



## PRODUCT

### POINT:



The GRD-UB400 Access Control Panel is designed for use by authorized personnel with specific, multi-level security codes. It allows authorized users to change settings such as detection Program and Sensitivity. A tamper alarm sounds within 10 seconds after the Access Touchpad is pressed, unless a proper access code is entered.

## PRODUCT PACKAGING

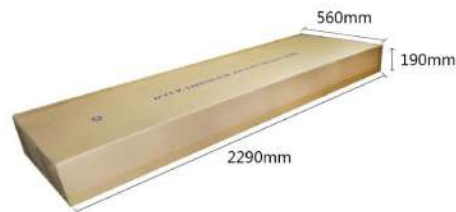

Recycling

Carton Dimension L\*W\*H (mm)  
Door Panel : 2290\*560\*190 mm  
Control Unit :760\*380\*260 mm  
Gross weight :45KG

We will arrange the most suitable logistics according to the actual situation and the customer's requirements. Our packing is very tight to prevent any breakage during shipment.